



**B.C.'s Heritage Millwork Manufacturer**  
*Restoration \* Windows \* Doors \* Mouldings*

Visit our website: [www.vintagewoodworks.ca](http://www.vintagewoodworks.ca)

408 Alpha Terrace, Victoria, BC. V8Z 1B6 Phone (250) 386-5354 Fax (250) 386-0161

## How to measure for rebated storm windows:



### For Double hung windows without exterior Casings (or with exterior stucco mouldings)

#### 1. Measure width.

To measure the width for your storm and screen windows, you will take three measurements. Measure the width between the blind stops at the top, centre, and bottom of the window (to help determine if the window is square. Use the **widest** of these three measurements. **Add 3/4" to the width –this gives you your finished rebated storm width and allows for a 1/8" clearance on both sides of the inner rebate.**

**BLIND STOP**

**STUCCO MOULD**

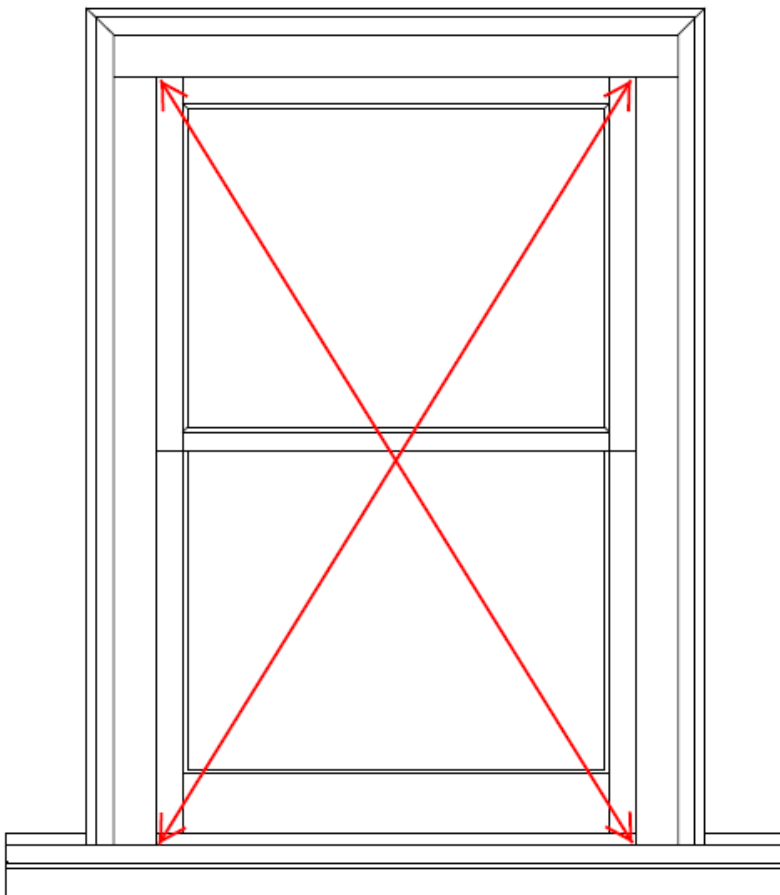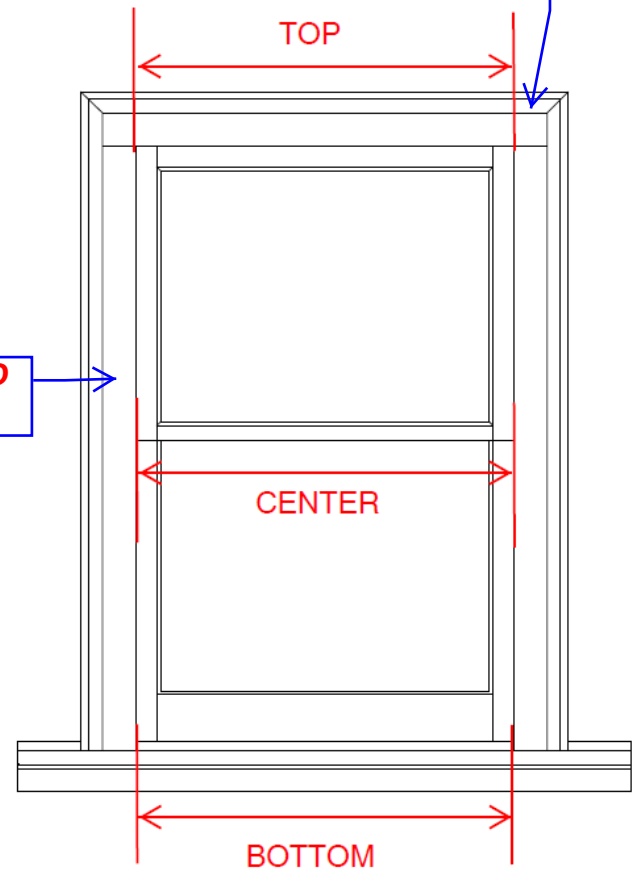



#### 2. Measure corner to corner

To confirm how square your window is.

**\*NOTE: If your windows are out of square some on-site fitting may be required.**

3. **Measure height.**

To measure the height for your storm and screen windows, measure from the sill to the bottom edge of the upper blind stop. **Add 3/8" to the height measurement; this gives you your finished rebated storm height and allows for 1/8" clearance on the top and bottom of the inner rebate.**

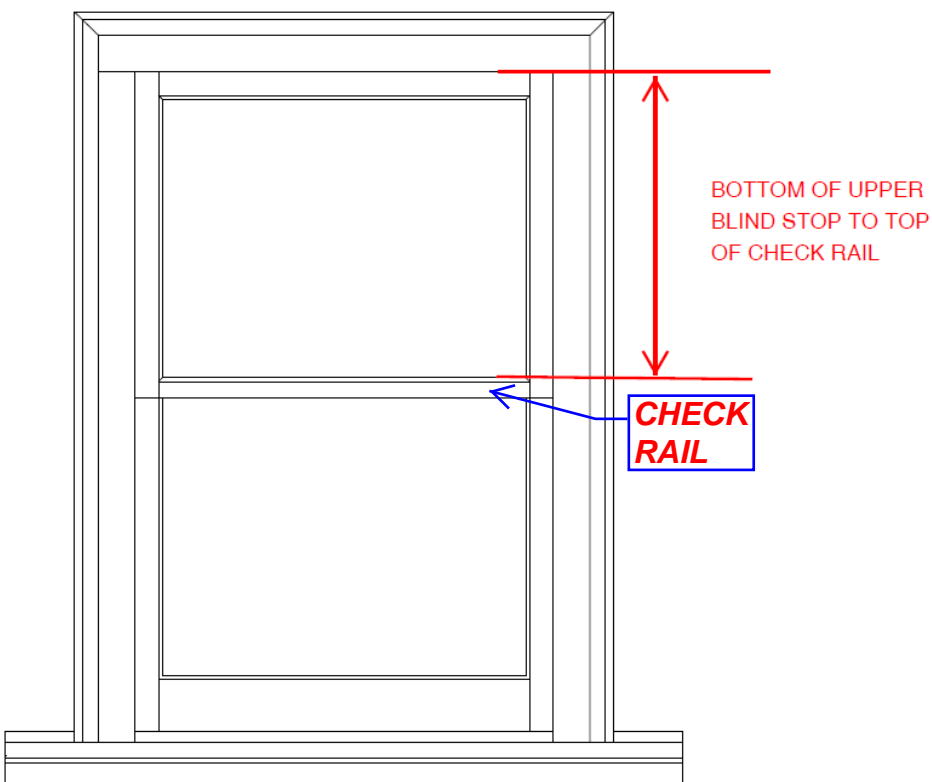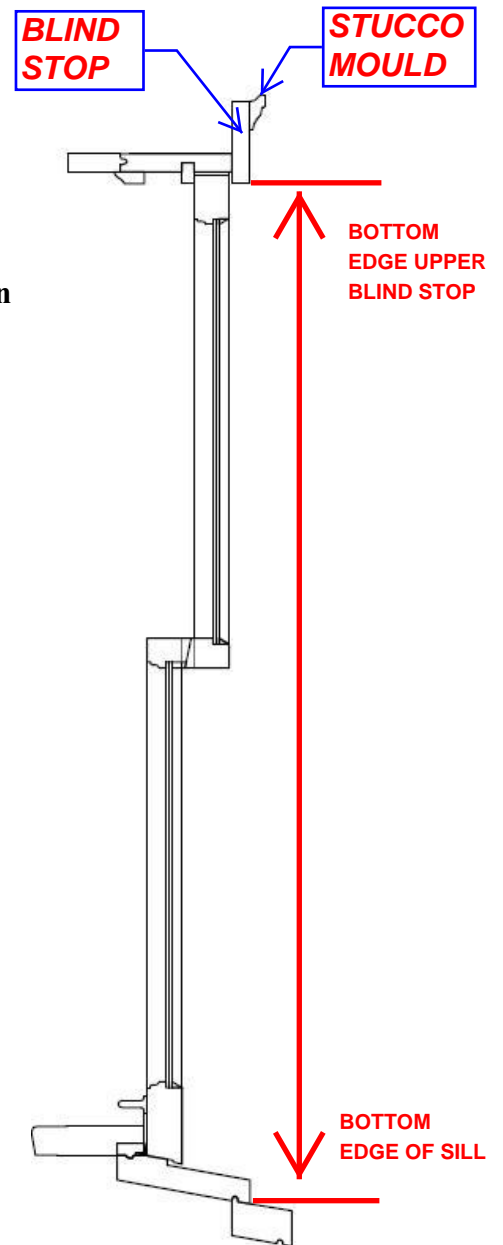


4. **Measure Check Rail.**

Measure from the bottom of the upper blind stop to the top of the check rail.

**Add 3/8" to the checkrail measurement; this re-aligns the checkrail height for the finished rebated storm.**


### 5. Height of bottom rail

The standard height of our storm and screen windows is 3 ½” and is well suited to have a nice sight-line with most double-hung windows. Our storms and screens can be built to accommodate custom bottom rail heights, custom charges will apply.

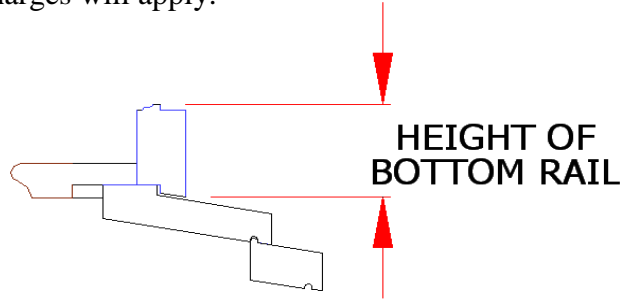

### 6. Slope of window sill.

The slope of your exterior window sills is required to match up the bottom rail of your storms and screens to your sills. They are typically 5-12 degrees. Our storm windows come with a standard 10 degree angle, and will fit nicely over most typical sills. If your sill slope is significantly different, please note this on your measurement sheet; custom charges may apply.

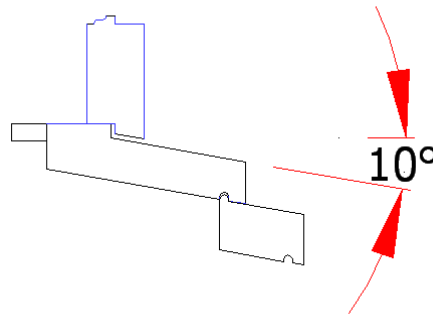

### 7. Hardware

We offer hardware for both fixed and opening storm and screen windows. Our fixed window hardware package includes storm hangers and snap fasteners. Hardware for opening storm and screen windows includes hangers and storm window openers.

